



| Technical data   |                    |
|------------------|--------------------|
| Power supply     | DC24V(DC16-32V)    |
| Current          | Max.70mA           |
| Damper area      | 0.04M <sup>2</sup> |
| Rotate direction | CW/CCW             |
| Torque           | 4kgf.cm            |
| Locked torque    | 12kgf.cm           |
| Locked current   | Max.250mA          |
| Rotate angle     | 90°(Adjustable)    |

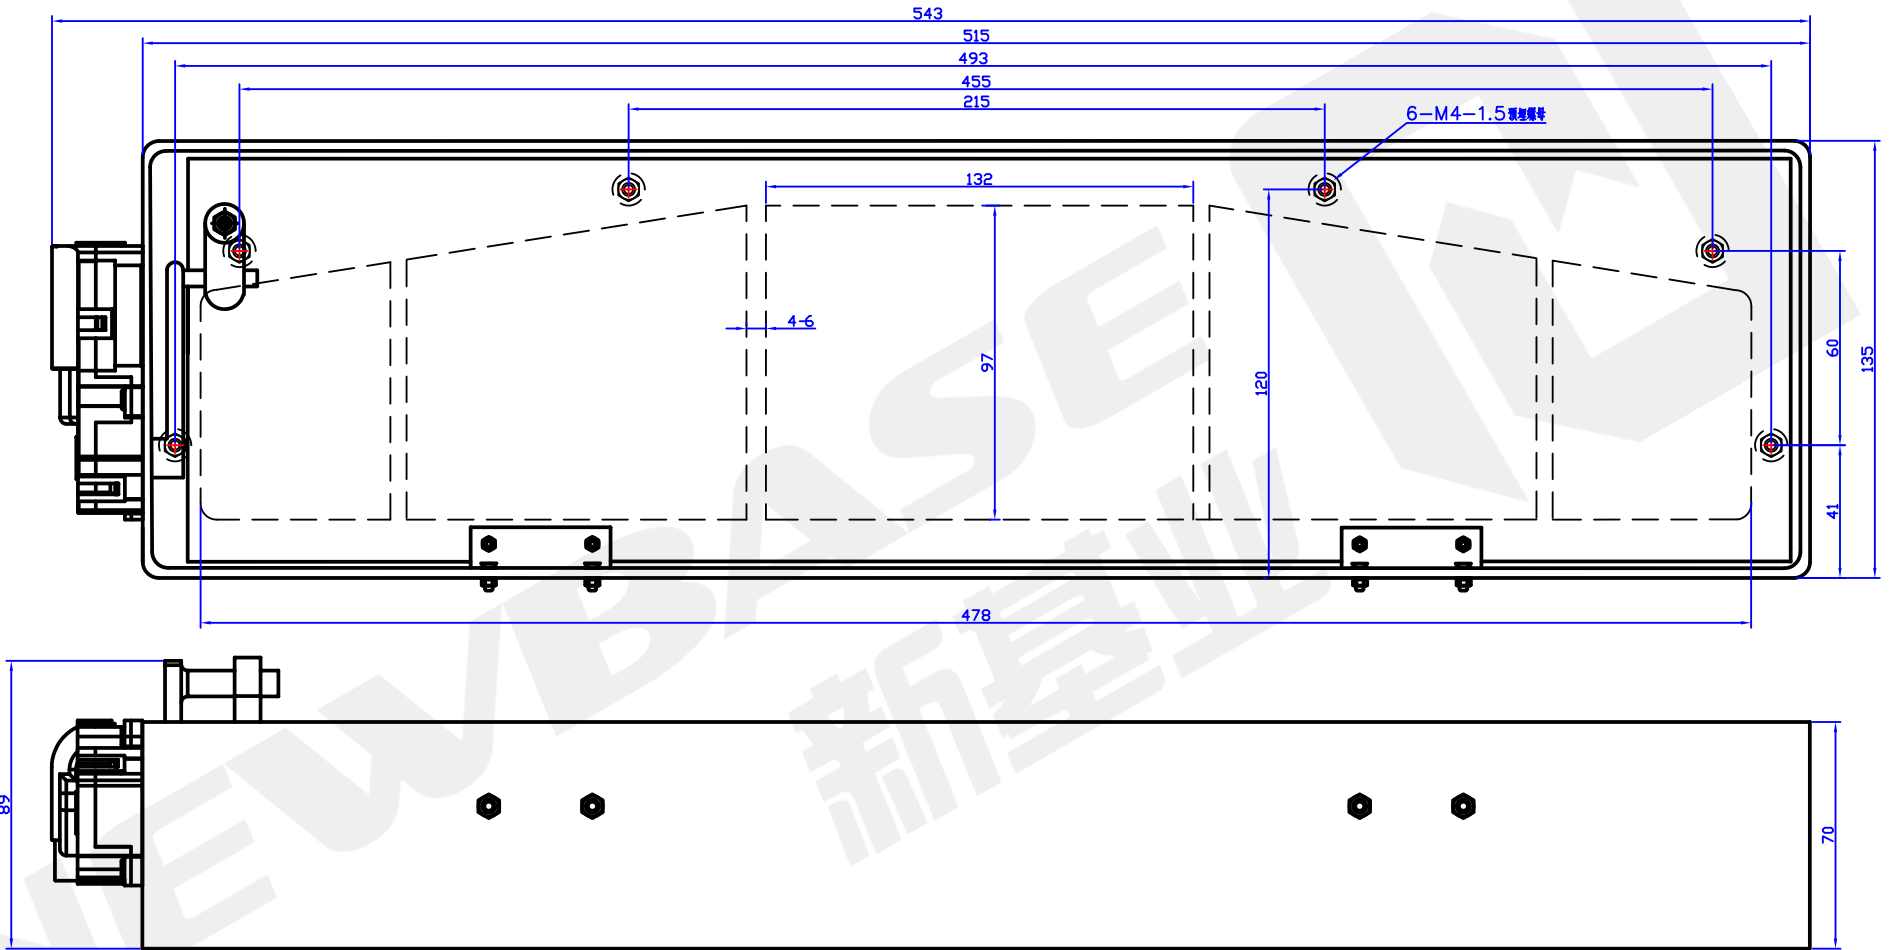

Wiring diagram



| NAME     |       |                         | PART NO.                                |  |
|----------|-------|-------------------------|---|--|
| DESIGNED |       | <b>FRESH AIR DAMPER</b> | XF-1                                    |  |
| CHECKED  |       |                         | MATERIAL                                |  |
| APPROVED |       |                         |   |  |
| WEIGHT   | SCALE | DATE                    | <b>NEWBASE AUTO ELECTRONICS CO.,LTD</b> |  |